
FOUNDATION SLEEVES, MOUNTING HARDWARE & LIGHTS

GALVANIZED STEEL FOUNDATION SLEEVES


The most common type of flagpole installation is the in-ground foundation sleeve method which calls for 1' of the flagpole to be encased in the ground sleeve for each 10' of exposed flagpole height. The diameter of the sleeve should be at least 2" greater than the outside diameter of the flagpole with the area between the flagpole and the sleeve filled with dry sand. Sleeves with a 6" diameter are supplied with a base plate and grounding spike. Sleeves with a diameter of greater than 6" are supplied with a base plate, support plate, grounding spike and, for ease of vertical alignment, steel centering wedges welded to the inside of the base plate. If you require other sizes than listed or have special on-site conditions please consult the factory.



6"

8"


96



ITEM#	Α	В	С	D	Е	F	1-5	6+	LBS.
380003	3'	8"	18"	6"	12"	6"	\$135	\$123	33
380004	3-1/2'	8"	18"	6"	12"	6"	137	127	40
380005	3'	10"	18"	6"	16"	8"	147	139	40
380006	3-1/2'	10"	18"	6"	16"	8"	157	150	45
380007	4'	12"	18"	6"	16"	8"	213	202	57
380008	5'	12"	18"	6"	18"	9"	249	236	65
380009	5'	15"	18"	6"	20"	10"	442	419	85
380010	6'	15"	18"	10"	20"	10"	510	487	120
380011	6'	18"	24"	10"	24"	12"	566	537	130
380012	7'	15"	24"	12"	24"	12"	566	537	140
380013	7'	18"	24"	12"	24"	12"	657	623	150
380014	8'	18"	24"	12"	24"	12"	701	668	160

PVC SLEEVES

Poles slip into form fit sleeves snugly - no voids to fill with sand. Standard sleeves require wood wedges & sand for a proper installation.

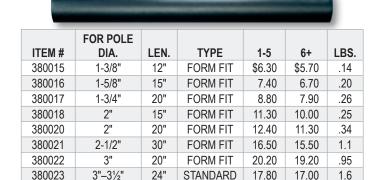

SLEEVES FOR FIBERGLASS FLAGPOLES

STANDARD

24.60

23.60

1.9

30"

380024

LBS.

20

24

92

3"-31/2"



ITEM #	LENGTH	DIAMETER	1-5	6+	LBS.
380025	18"	6.3"	\$32	\$30	1.1
380026	24"	5"	44	41	1.4
380194	30"	6.3"	46	43	2.2
380195	30"	9-1/4"	93	83	4.0
380027	36"	8"	93	83	4.4
380029	48"	8"	117	105	6.2
380030	60"	14"	336	304	18
380031	72"	14"	430	386	27
380032	84"	21"	935	873	34

GALVANIZED STEEL ANCHOR BOLTS



ITEM#	Α	В	С	D	1-5	6+	LBS.
380037	16"	5/8"	3-1/2"	4"	\$23	\$21	2.2
380038	24"	3/4"	4"	5"	24	22	3.3
380039	36"	1"	4"	6"	39	37	8.1
380040	40"	1"	4"	6"	47	45	8.9
380041	54"	1-1/4"	6"	8"	118	108	29

COPPER CLAD LIGHTNING KIT

Each kit contains 5' long by 1/2" diameter copper clad rod, one 3' long by 1/2" diameter copper wire plus one connecting bracket.



COMPLETE SET						
ITEM # 1-5 6+ LBS						
380033	\$111	\$100	4.5			

эхт	12 ROD ON	ROD ONLY			
ITEM#	PRICE	LBS.			
380035	\$61	1.2			

WIRE ONLY					
ITEM# PER FOOT LBS.					
380034	\$8.50	.36			

BRACKET ONLY					
ITEM#	1-5	6+	LBS.		
380036	\$34	\$31	.36		

380002

3'

6"